



## MODEL 2700 Holding Tank – 1 Piece Unit Balancing Capacity ..... 2756 Litres

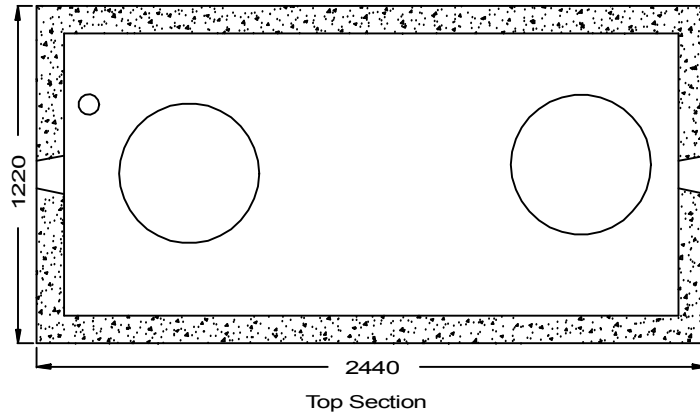


- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
  - Single units are used as holding or balancing tanks.
  - Tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air.
  - Steel reinforced with 10m Rebar, spaced at 600mm long axis, 800mm short axis. CAN/CSA-G30.18
  - 1.5 kg. structural fiber added to concrete. ASTM C 1116
  - Top 10m spaced at 200mm both directions.
  - Rebar cover 25mm.
  - Tanks conform to National Standards of Canada CAN/CSA B66-05
  - Non sulphate resistant concrete.
  - Standard 3 inlets.
- Bare Weight ..... 2800 kg  
 Lid Weight ..... 710 kg  
 Total Tank Weight 3510 kg

- Notes
- 1: 75mm PVC pipe cast in top of lid for access to any electrical cords.
  2. Water storage capacity to under side of top..... **3,469 Lt.**
  3. Cast in place 24"ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.
  4. 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

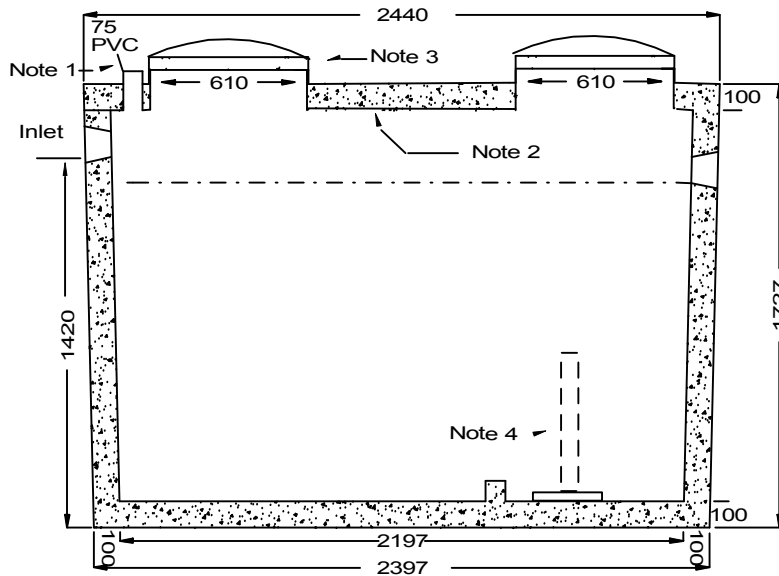

Side Elevation Section

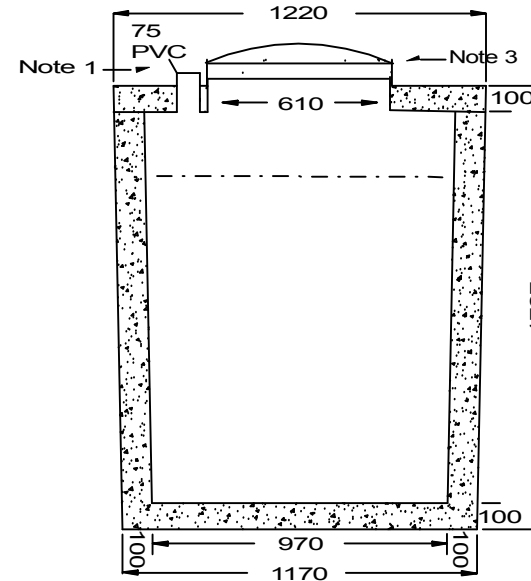

End Elevation Section

Tank markings observed:  
 Inlet & outlet  
 Marked on tank top - inlet end

NPCP 2007  
 2700  
 HOLDING  
 BD 1M  
 WC 2756  
 NON-SUL  
 AGINP  
 PML