



NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

MODEL 30000 Holding Tank – 3 Piece Unit Balancing Capacity 31818 LITRES

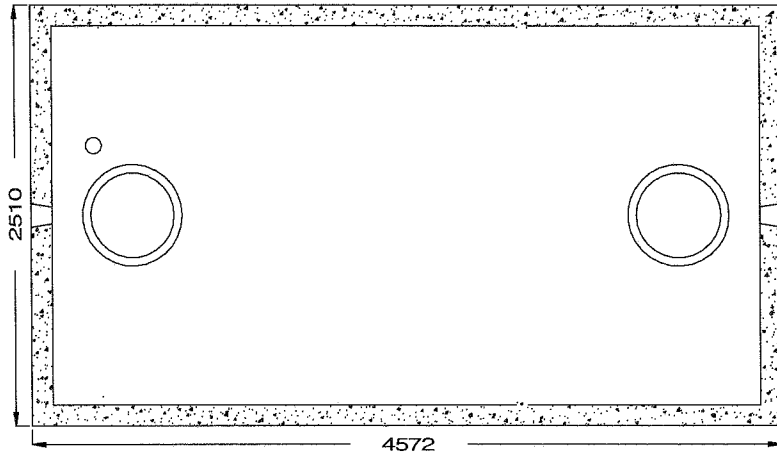

Top Section

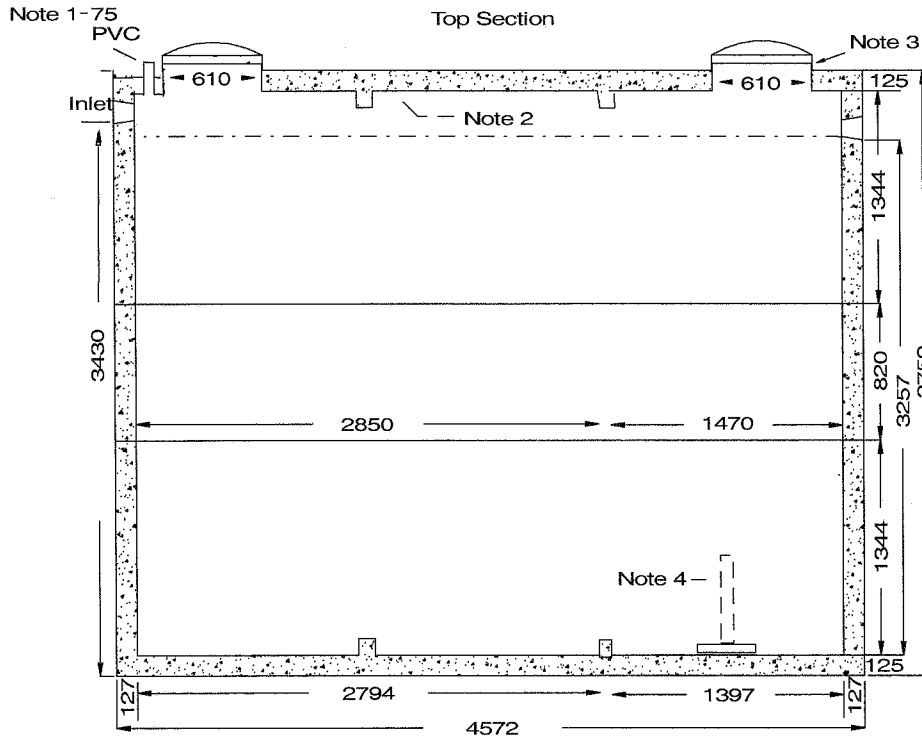

Side Elevation Section

- This tank design is installed in multiple units.
- Each unit has a Tongue and groove design and is sealed with a fibrous mastic sealant.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with 10m Rebar, spaced at 400mm each direction and
- 20m spaced 200mm each direction in bottom and middle units. CAN/CSA-G30.18
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05.
- Non-sulphate resistant concrete.
- Standard 3 inlets.

Top Unit Weight 8420 kg
Centre Unit Weight 3508 kg
Bottom Unit Weight 8270 kg
Total Tank Weight 20198 kg

Notes 1: 75mm pipe cast in top of lid for access of any electrical cords.


2: Water storage capacity to under side of top **35,293 Lt.**

3: Cast in place 24"ID plastic risers with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.

4: 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.


To ensure water-tight seal, it is recommended that the joint be grouted both inside and out

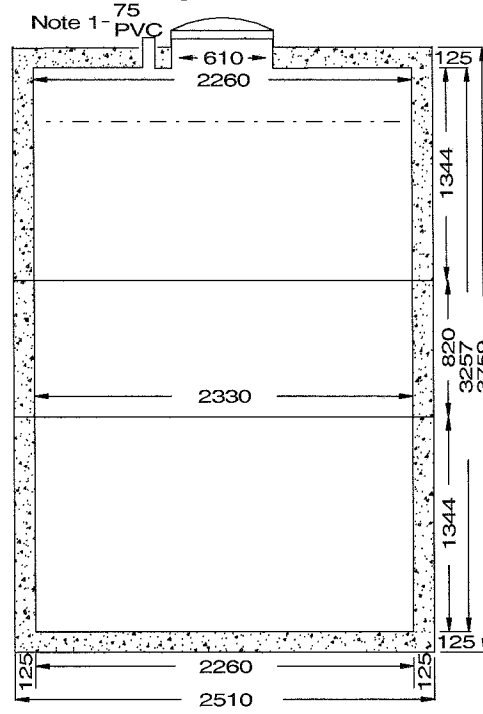

End Elevation Section

Tank markings observed:
Inlet & outlet
Marked on tank top - inlet end

NPCP 2007
30000
SEPTIC
BD 1M
WC 31746
NON-SUL
AGINP
PML



Tongue and Groove Joint