



# NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

## Model 3600 Holding Tank – 1 Piece Unit Balancing Capacity ..... 3623 Litres

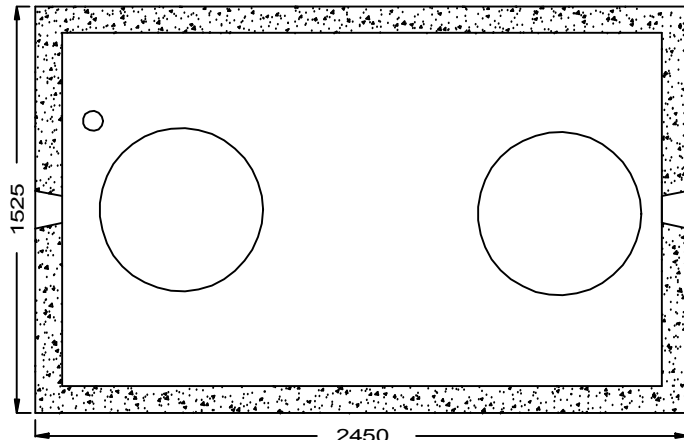

Top Section

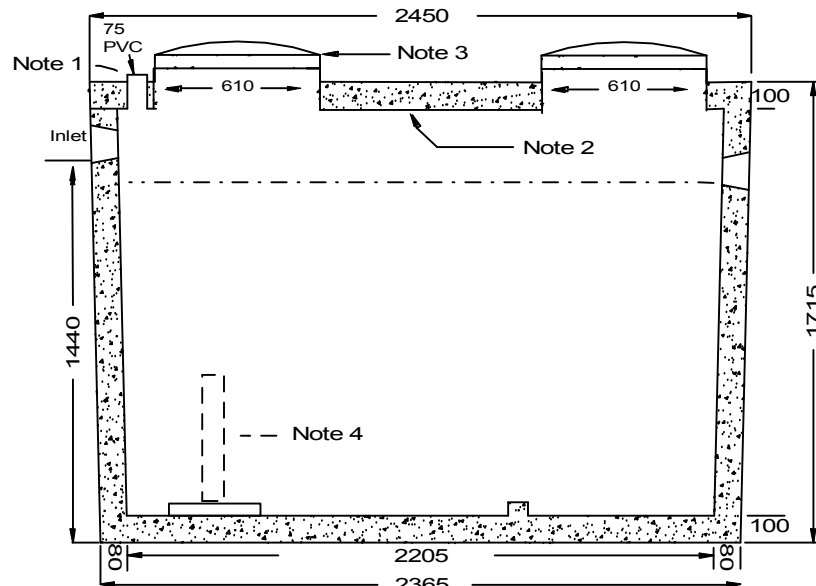


Side Elevation Section

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- Steel reinforced with 10m rebar, spaced 600mm long axis, 800mm short axis.CAN/CSA-G30.18
- 1.5 kg structural fiber added to concrete.
- Top 10m spaced at 200mm both directions.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Non sulphate resistant concrete.
- Standard 3 outlet.

Bare Weight ..... 3260 kg  
Lid Weight ..... 910 kg  
Total Weight ..... 4170 kg

- Notes: 1: 75 mm. Pipe cast in top of lid for access to any electrical cords  
2: Water storage capacity to under side of top..... **4,544 Ltr.**  
3: Cast in place 24" ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.  
4: 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

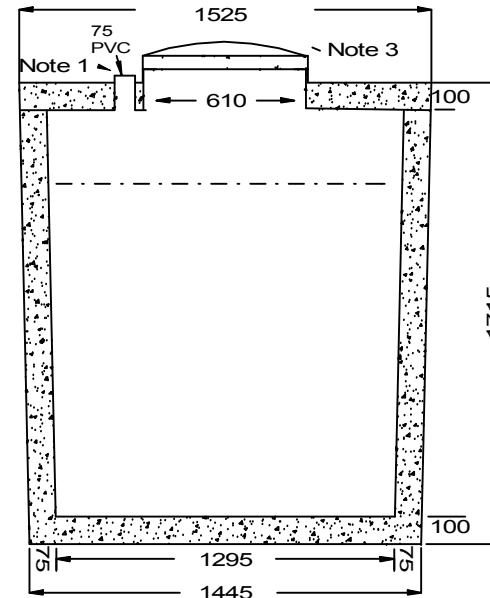

End Elevation Section

Tank markings observed;  
Inlet & outlet.  
Marked on tank top - inlet end

NPCP 2007  
3600  
HOLDING  
BD 1M  
WC 3623  
NON-SUL  
AGINP  
PML