

Model 22500 Holding Tank Low Profile Balancing Capacity 19980

- This tank design is installed for wet or rock conditions.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with 20M Rebar, spaced 300mm apart, each direction. at 50mm cover. CAN/CSA-G30.18
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Standard 3 inlets.
- Non sulphate resistant concrete.
- Standard 3 inlets.


Bare Weight 19960 kg
 Lid Weight 7170 kg
 Total Tank Weight 27130 kg

- Notes 1: 75mm pipe cast in top of lid for access of any electrical cords.
 2. Water storage capacity to under side of top **24,862 Ltrs.**
 3. Cast in place 24"ID plastic riser with plastic lids secured with stainless steel fasteners extending 100mm above top of tank.
 4. 610 x 610 knockout.
 5. 750mm high float tree available upon request.


Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

Tank markings observed:
 Inlet & outlet
 Marked on tank top - inlet end


NPCP 2007
22500 L
HOLDING
BD 1M
WC 19980
NON-SUL
AGINP
PML

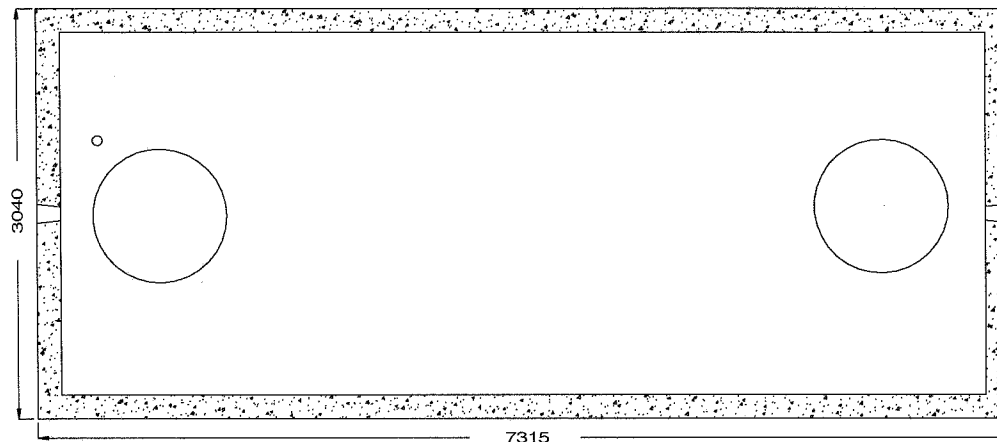

Top Section

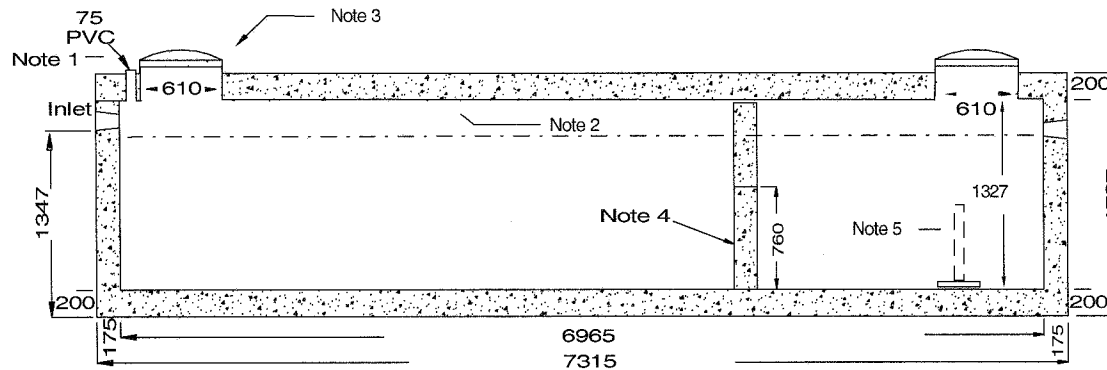

Side Elevation Section

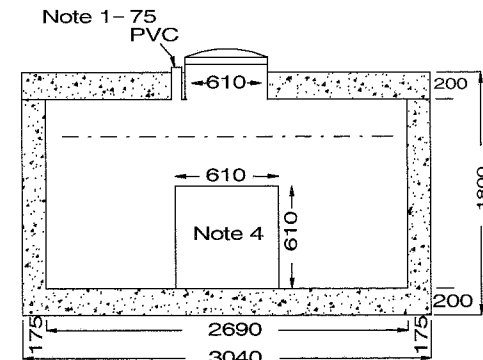

End Elevation Section