


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

TELEPHONE: 905 852 6111 : TOLL FREE 1-800 263 1297

Model Low 4500 Holding Tank – 1 Piece Unit
Balancing Capacity 5396 Litres

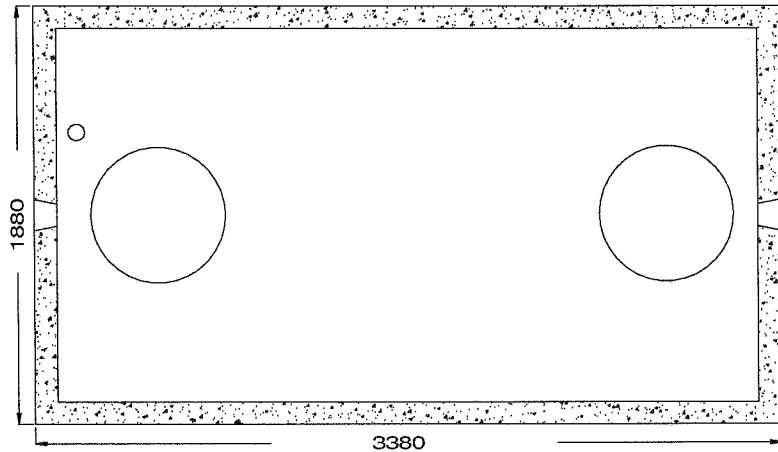


Top Section

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- Steel reinforced with 10m Rebar, spaced 600mm long axis, 800mm short axis. CAN/CSA-G30.18
- Top 10m spaced at 200mm both directions.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05.
- Non sulphate resistant concrete.
- Standard 3 inlets.


Bare Weight 3590 kg
Lid Weight 1550 kg
Total Tank Weight 5140 kg

- Note: 1: 75 mm. Pipe cast in top of lid for access to any electrical cords.
2. Water storage capacity to under side of top **6,749 Lt.**
3. Cast in place 24"ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.
4. 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

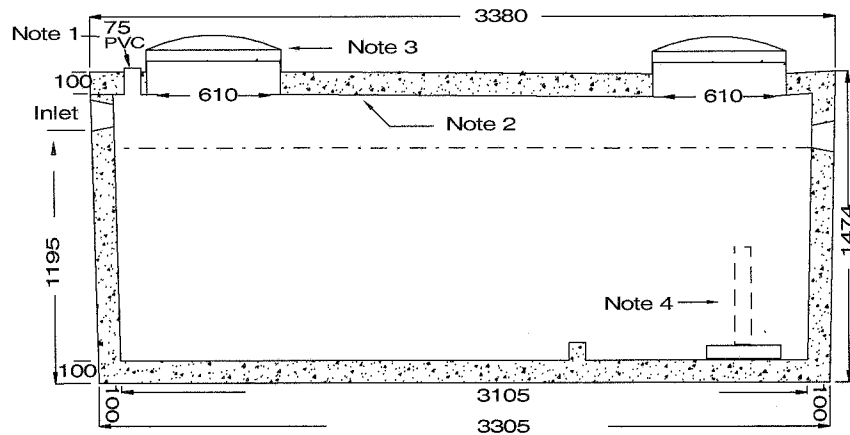

Side Elevation Section

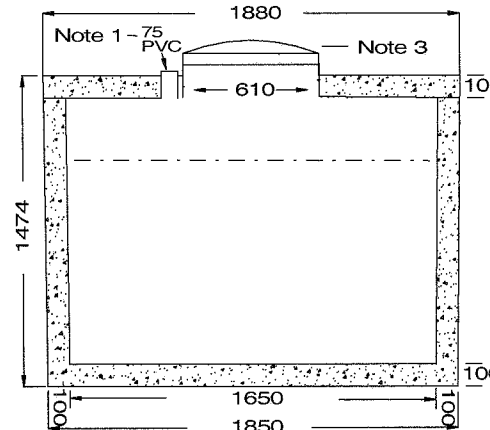

End Elevation Section

Tank markings observed:
Inlet & outlet
Marked on tank lid - inlet end

NPCP 2007
4500L
HOLDING
BD 1M
WC 5396
NON-SUL
AGINP
PML