


Model 9000 Holding Tank Low Profile  
 Balancing Capacity ..... 10366 Lt.

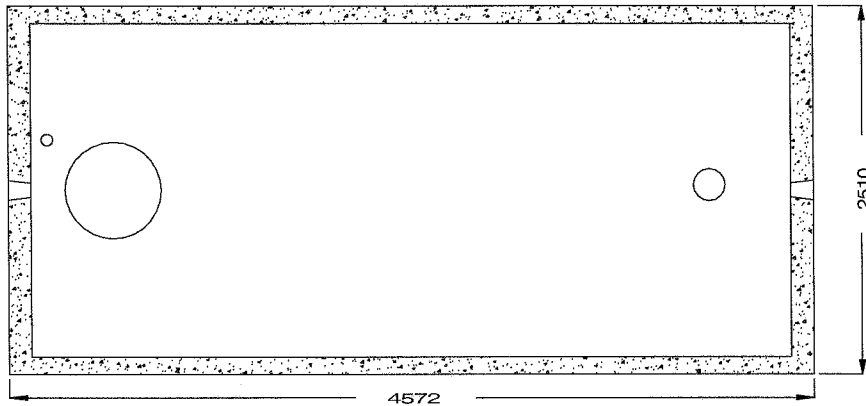

Top Section


- . Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- . Tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air.
- . Steel reinforced with 10m rebar, spaced at 400mm each direction. CAN/CSA-G30.18
- . Rebar cover 25mm.
- . Tanks conform to National Standards of Canada CAN/CSA B66-05
- . Non sulphate resistant concrete.
- . Standard 3 inlets.

Bare weight .....7,470 Kg  
 Lid weight..... 3,510 kg  
 Total Tank Weight ..... 10,980 Kg.


Notes:

1. 75mm diameter PVC pipe cast in to facilitate pump installation or venting.
2. Water storage capacity to under side of top..... **12,942 Lt.**
3. Cast in place 24"ID plastic riser with plastic lids secured with stainless steel fasteners extending 100mm above top of tank.
4. 150mm x 460mm PVC pipe as pump out extension.
5. 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

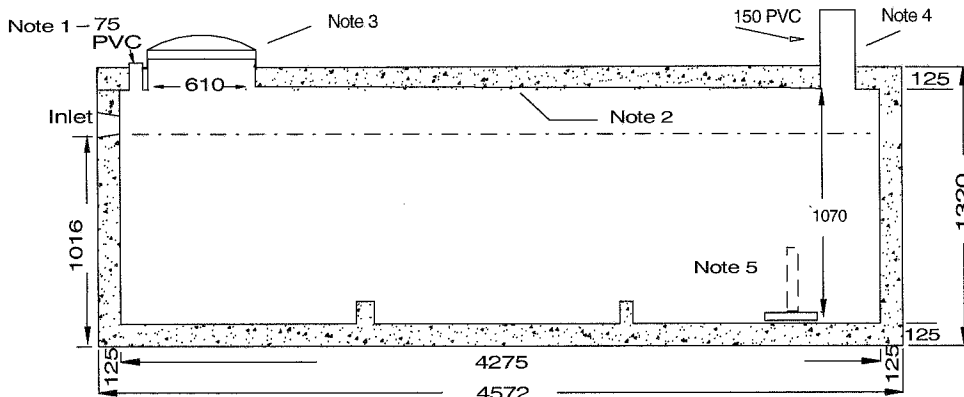

Side Elevation Section

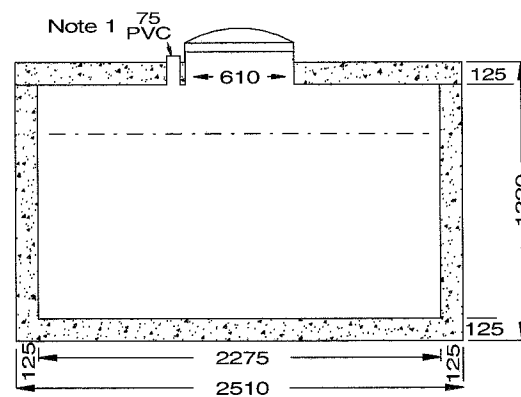

End Elevation Section

Tank markings observed:  
 Inlet & outlet  
 Marked on tank top - inlet end

NPCP 2007  
 9000L  
 HOLDING  
 BD 1M  
 WC 8731  
 NON-SUL  
 AGINP  
 PML