


Model 22500 (5000) Septic Low Profile
Working Capacity 19980 Litres (4395 GAL)

- This tank design is installed for wet or rock conditions.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with 20m Rebar, spaced 300mm apart, each direction at 50mm cover. CAN/CSA-G30.18
- Tanks conform to National Standards of Canada CDN/CSA B66-05.
- Non sulphate resistant concrete.
- Chamber divider monolithically cast with structure.

Notes

- 1: Two 100 x 150 partition flow through.
- 2: Plastic inlet baffle prefitted to accommodate 3 inlets.
- 3: Provisions made for installation of outlet filter designed for daily flow rate.
- 4: 610mm ID. plastic risers poured in with plastic lids secured with stainless steel fasteners extending 100mm above top of tank.

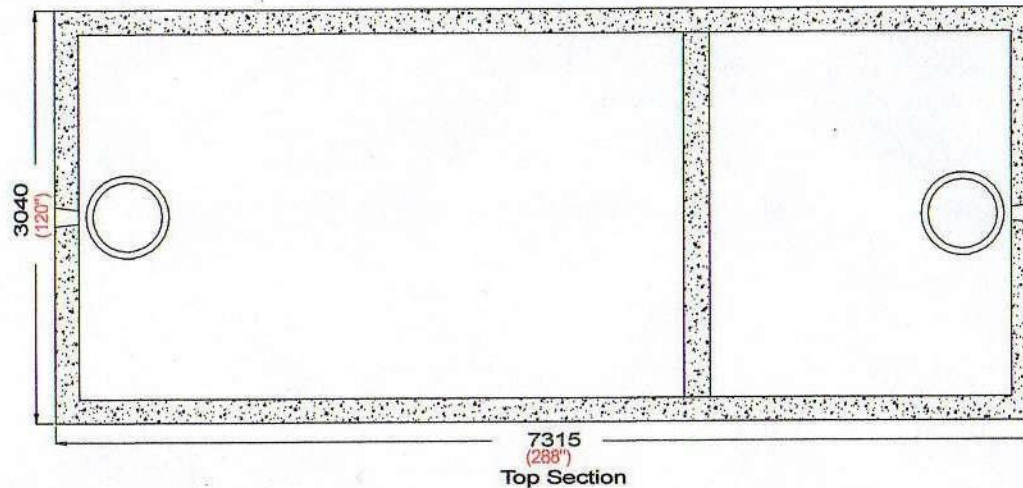

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

Bare Weight 19960 kg (44003 lb)
Lid Weight 7170 kg (15806 lb)
Total Tank Weight 27130 kg (59809 lb)

Tank markings observed:
Inlet & outlet are marked.
Tank is marked on tank lid - inlet end

NPCP 2009
LO 22500
SEPTIC
BD 1M
WC 19980
NON-SUL
AGINP
PML

