


Model Low 3600 (800) Holding Tank – 1 Piece Unit
 Balancing Capacity 3280 Litres (721gal)

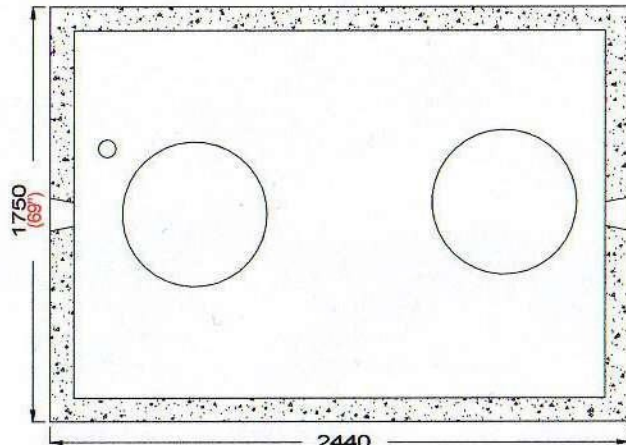


Top Section

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- Steel reinforced with 10m Rebar, spaced 600mm long axis, 800 short axis. CAN/CSA-G30.18
- 1.5 kg. structural fiber added to concrete. ASTM C 1116.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Non sulphate resistant concrete.
- Standard 3 inlets.


Bare Weight 3260 kg (7187 lb)
 Lid Weight 1040 kg (2293 lb)
 Total Tank Weight 4300 kg (9480 lb)

- Note 1: 75 mm. Pipe cast in top of lid for access to any electrical cords.
 Note 2: Water storage capacity to under side of tank..... 4,247 Lt. (934gal)
 Note 3: Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.
 Note 4: 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

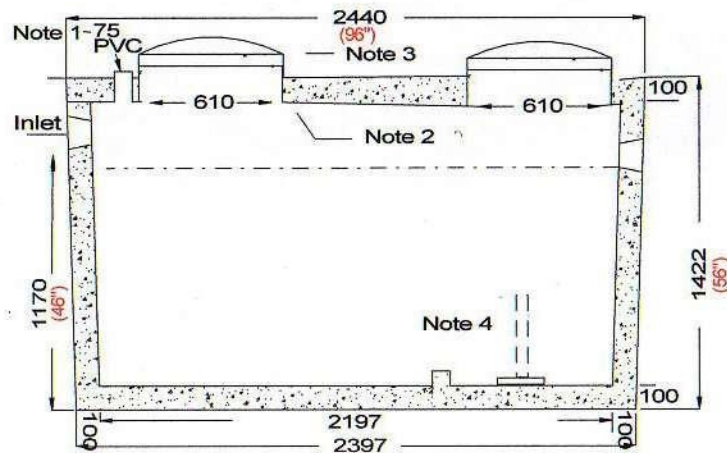

Side Elevation Section

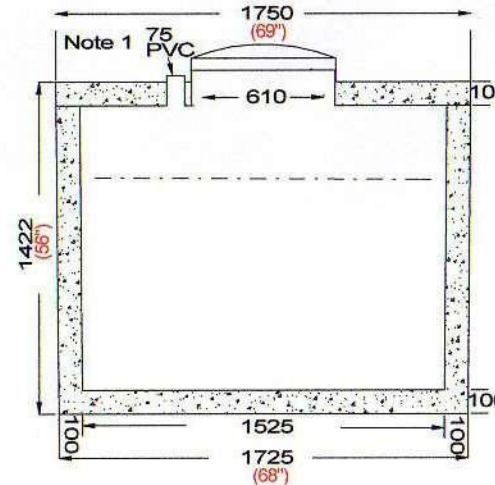

End Elevation Section

Tank markings observed:
 Inlet & outlet
 Marked on tank top

NPCP 2009
 3600L
 HOLDING
 BD 1M
 WC 3280
 NON-SUL
 AGINP
 PML