


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

MODEL 3600 (800) SEPTIC TANK — 1 PIECE WORKING CAPACITY..... 3673 LITRES (808GAL)


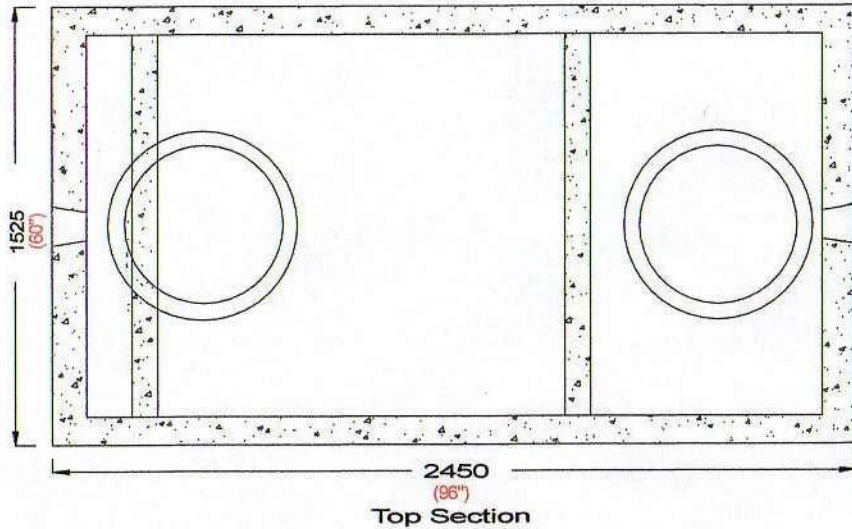


- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air.
- Steel reinforced with 10m rebar, spaced at 600mm long axis, 800mm short axis. CAN/CSA-G30.18
- 1.5 kg structural fiber added to concrete. ASTM C 1116.
- Top 10m spaced at 200mm both directions.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Non sulphate resistant concrete.
- Chamber divider monolithically cast with structure.

Bare weight 3355 kg. (7396 lb)
Lid weight 910 kg. (2006 lb)
Total tank weight ...4265 kg (9402 lb)

- Notes: 1. Two 100x150 holes thru partition.
2. Concrete inlet baffle is prefitted to accommodate 3 inlets.
3. Provisions made for installation of outlet filter designed for daily flow rate.
4. Cast in place 610mm ID. plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

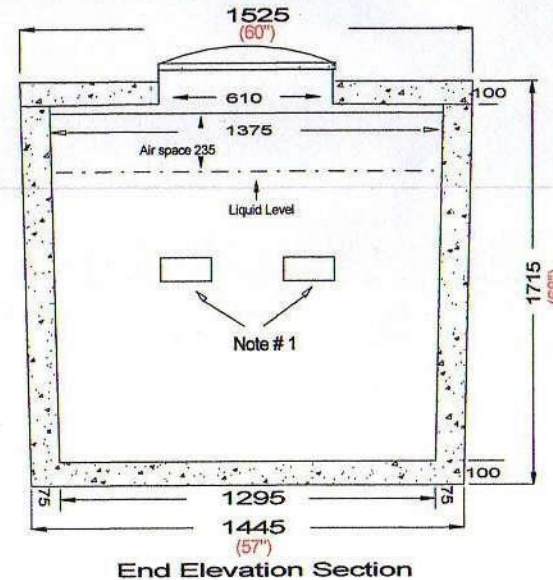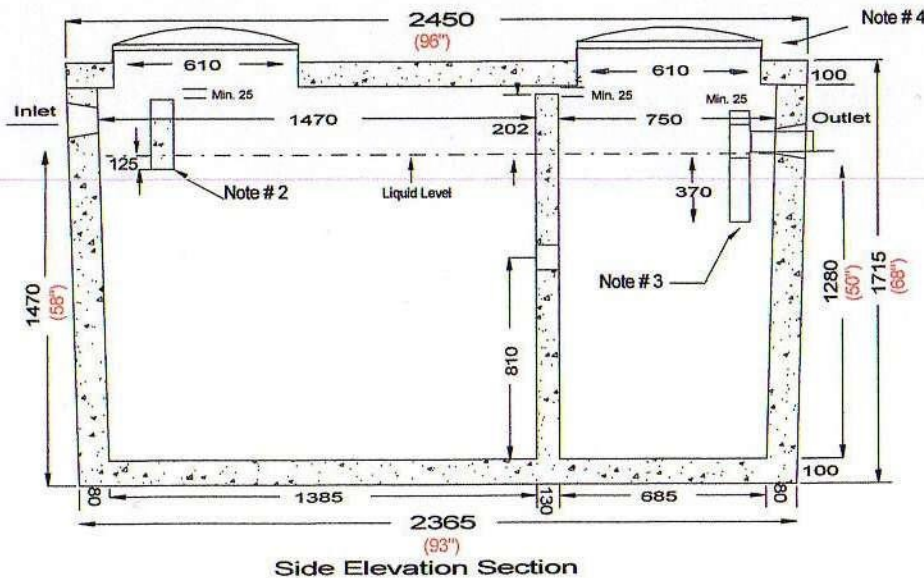

Tank markings observed:
Inlet & outlet are marked.
Tank is marked on tank lid
Inlet End

NPCP 2009
3600
SEPTIC
BD 1M
WC 3673
NON-SUL
AGINP
PML