


NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297



Model Low 4500 (1000) Holding Tank – 1 Piece Unit Balancing Capacity 5396 Litres (1186gal)

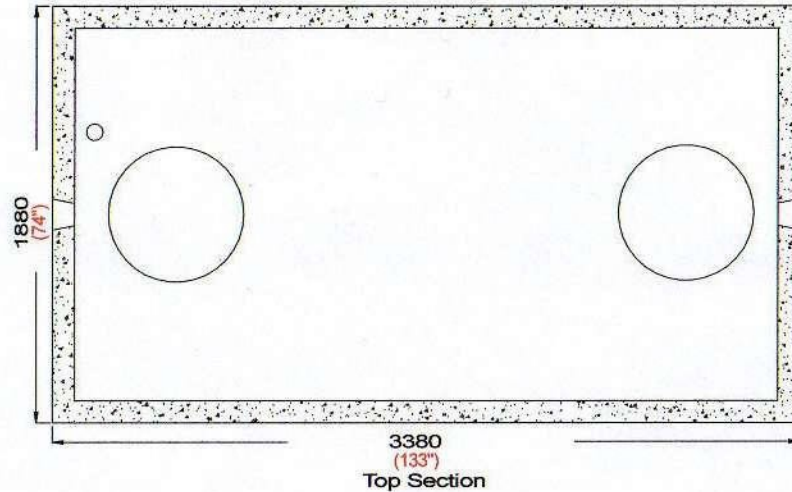

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- Steel reinforced with 10m Rebar, spaced 600mm long axis, 800mm short axis. CAN/CSA-G30.18
- Top 10m spaced at 200mm both directions.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05.
- Non sulphate resistant concrete.
- Standard 3 inlets.

Bare Weight 3590 kg (7914 lb)
Lid Weight 1550 kg (3417 lb)
Total Tank Weight 5140 kg (11331 lb)

- Note: 1: 75 mm. Pipe cast in top of lid for access to any electrical cords.
2. Water storage capacity to under side of top 6,749 Lt. (1485gal)
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.
4. 750mm high float tree available upon request.
- Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

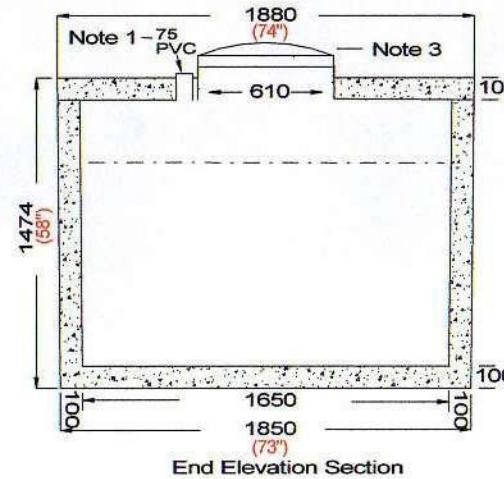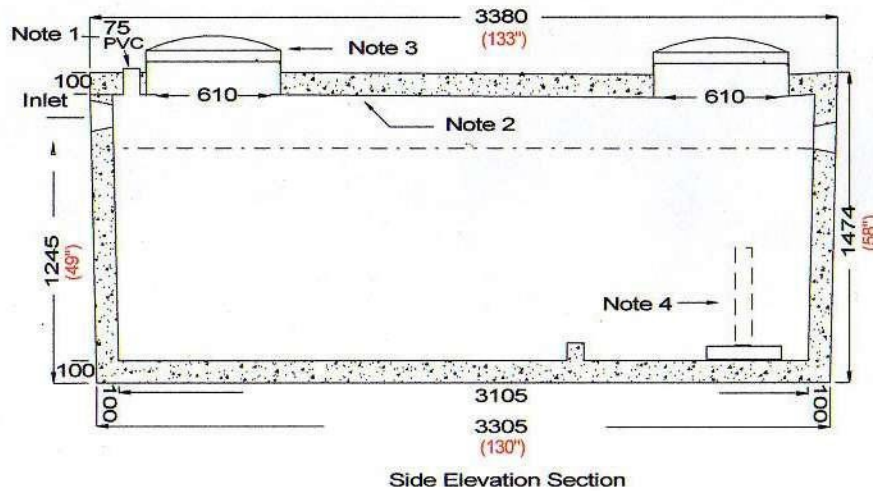

Tank markings observed:
Inlet & outlet
Marked on tank lid - inlet end

NPCP 2009
4500L
HOLDING
BD 1M
WC 5396
NON-SUL
AGINP
PML