


MODEL 9000 (2000) Septic Low Profile – 1 Piece
 WORKING CAPACITY 10366 LITRES (2280 GAL.)


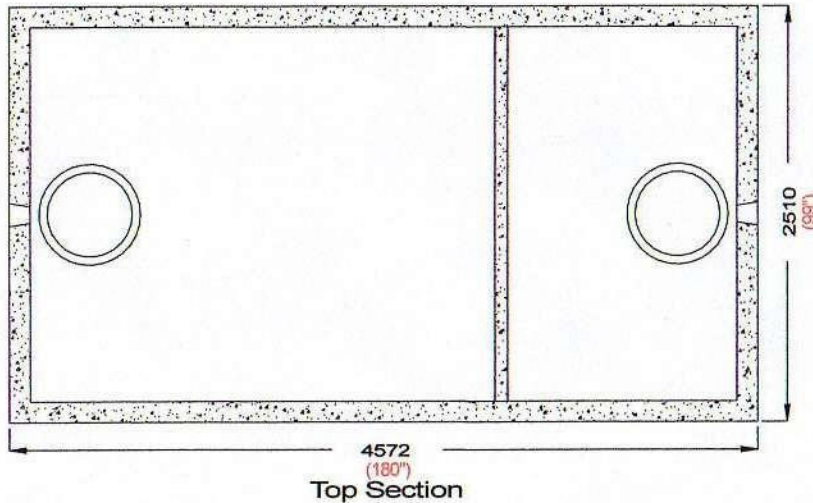


- This tank design is installed for wet or rock conditions.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with 10m Rebar, spaced 400mm apart, each direction. CAN/CSA-G30.18
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Non sulphate resistant concrete.
- Chamber divider monolithically cast with structure.

Bare Weight 7470 kg (16468 lb)
 Lid Weight 3510 kg (7738 lb)
 Total Tank Weight 10980 kg (24206 lb)

- Notes 1: Two 100 x 150 partition flow through.
 2: Plastic inlet baffle prefitted to accommodate 3 inlets.
 3: Provisions made for installation of outlet filter designed for daily flow rate.
 4: Cast in place 610mm ID. plastic risers with plastic lids secured with stainless steel fasteners extending 100mm above top of tank.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

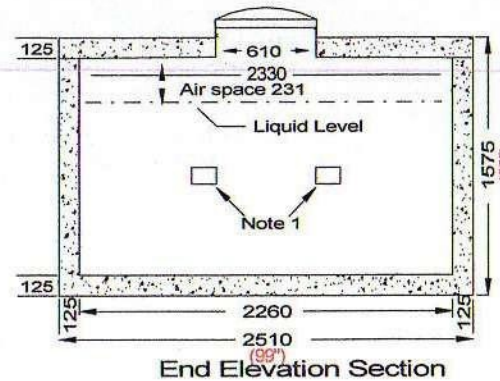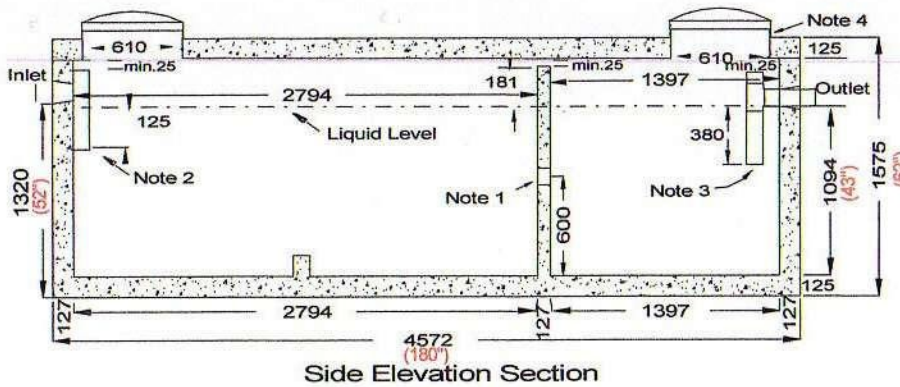

Tank markings observed:
 Inlet & outlet are marked.
 Tank is marked on tank lid - inlet end

NPCP 2009
 LO 9000
 SEPTIC
 BD 1M
 WC 10366
 NON-SUL
 AGINP
 PML