


NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 9000 (2000) Holding Tank Low Profile Balancing Capacity 10366 Lt. (2280gal)

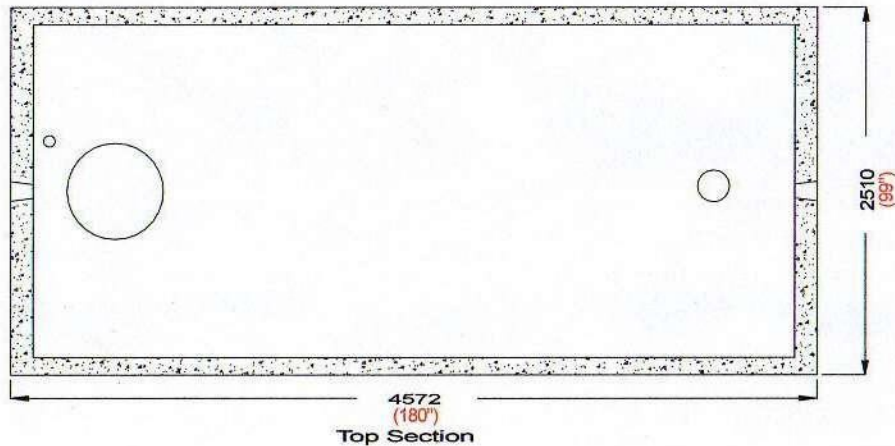



- . Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- . Tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air.
- . Steel reinforced with 10m rebar, spaced at 400mm each direction. CAN/CSA-G30.18
- . Rebar cover 25mm.
- . Tanks conform to National Standards of Canada CAN/CSA B66-05
- . Non sulphate resistant concrete.
- . Standard 3 inlets.

Bare weight 7,470 Kg (16468 lb)
Lid weight 3,510 kg (7738 lb)
Total Tank Weight 10,980 Kg. (24206 lb)

Notes:

1. 75mm diameter PVC pipe cast in to facilitate pump installation or venting.
2. Water storage capacity to under side of top 12,942 Lt. (2846gal)
3. Cast in place 610mm ID plastic riser with plastic lids secured with stainless steel fasteners extending 100mm above top of tank.
4. 150mm x 460mm PVC pipe as pump out extension.
5. 750mm high float tree available upon request.

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

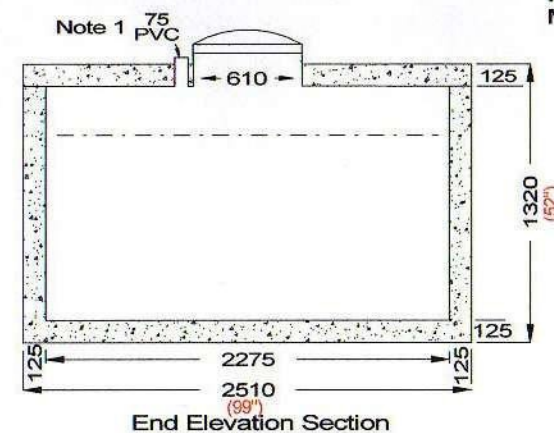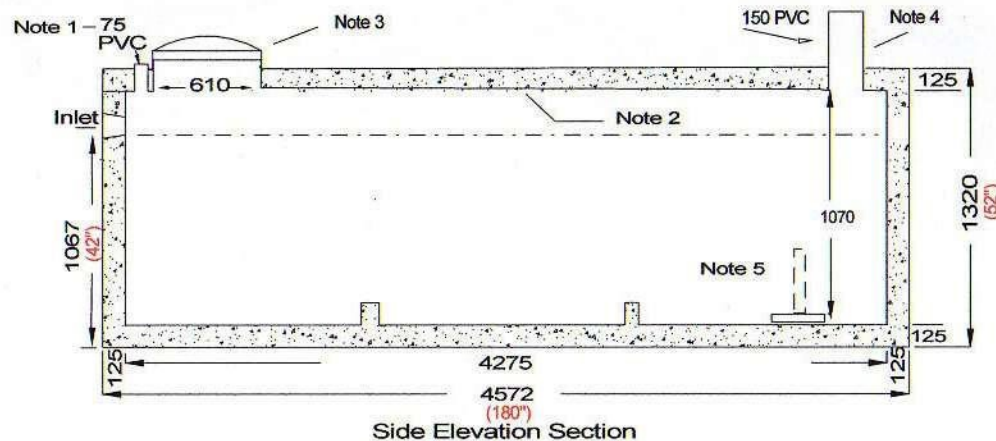

Tank markings observed:
Inlet & outlet
Marked on tank top - inlet end

NPCCP 2009
 9000L
 HOLDING
 BD 1M
 WC 8731
 NON-SUL
 AGINP
 PML