


NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 11250 (2500) Holding Tank Low Profile Balancing Capacity 11,106 Litres (2443gal.)

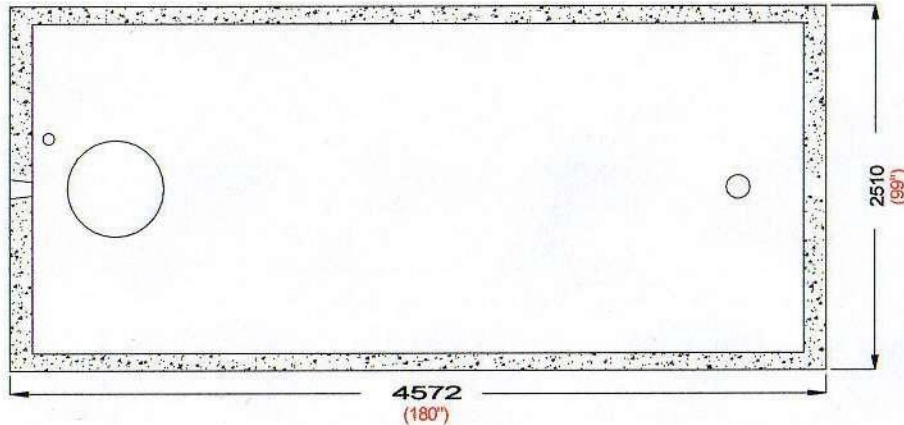


Top Section

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air.
- Steel reinforced with 10mm rebar, spaced at 400mm each directions. CAN/CSA-G30.18
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05
- Non sulphate resistant concrete.
- Standard 3 inlets.


Bare weight	8,270 Kg (18232 lb)
Lid weight.....	3,508 kg (7734 lb)
Total Tank Weight	11,778 Kg. (25966 lb)

- Notes: 1. 75mm diameter PVC pipe cast in top of lid for access to any electrical cords.
 2. Water storage capacity to under side of top 12,852 Ltr. 2827gal)
 3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.
 4. 150mm x 460mm PVC pipe as pump out extension

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

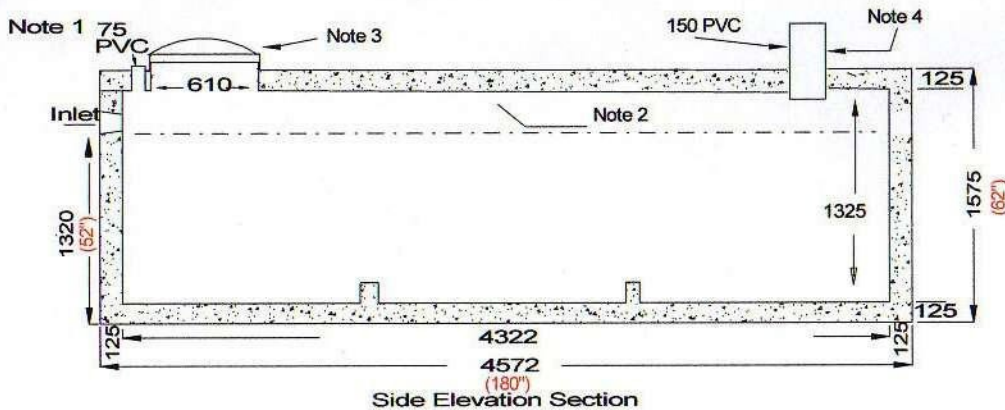

Side Elevation Section

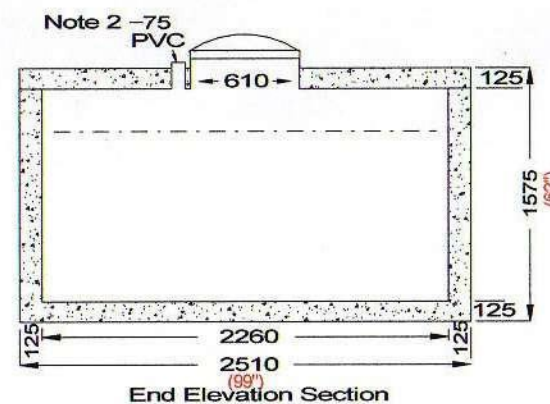

End Elevation Section

Tank markings observed:
Inlet & outlet
Marked on tank top

NPCP 2009
11250L
HOLDING
BD 1M
WC 11106
NON-SUL
AGINP
PML