


# NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

## Model 13500 (3000) Holding Tank – High Water

Working Capacity ..... 13534 Litres (2977gal.)

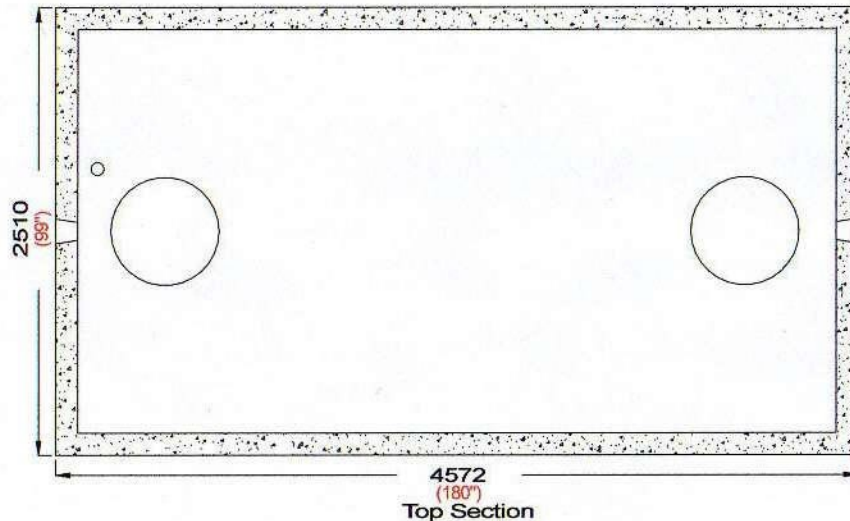



- This tank design is installed in multiple units.
- Tongue and groove design is sealed with a fibrous mastic sealant.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with 10M rebar, spaced at 400mm each direction.CAN/CSA-G30.18
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-05.
- Standard 3 inlets.
- Non sulphate resistant concrete.

Top Weight ..... 8270 kg (18232 lb)  
 Bottom Weight ... 5776 kg (12734 lb)  
 Total Tank Weight .... 14046 kg (30966 lb)

- Notes 1: 75mm diameter pipe cast in to facilitate pump installation or venting  
 2. Water storage capacity to under side of top ..... 16,155 Lt. (3553gal)  
 3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.  
 4. 750mm high float tree available upon request.


Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks are available upon request.

To ensure water-tight seal, it is recommended that the joint be grouted both inside and out.

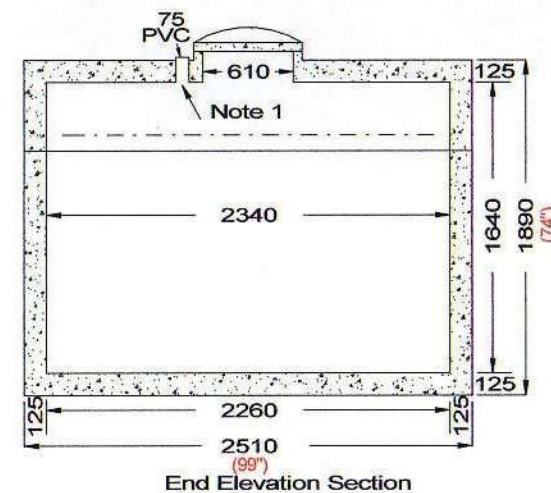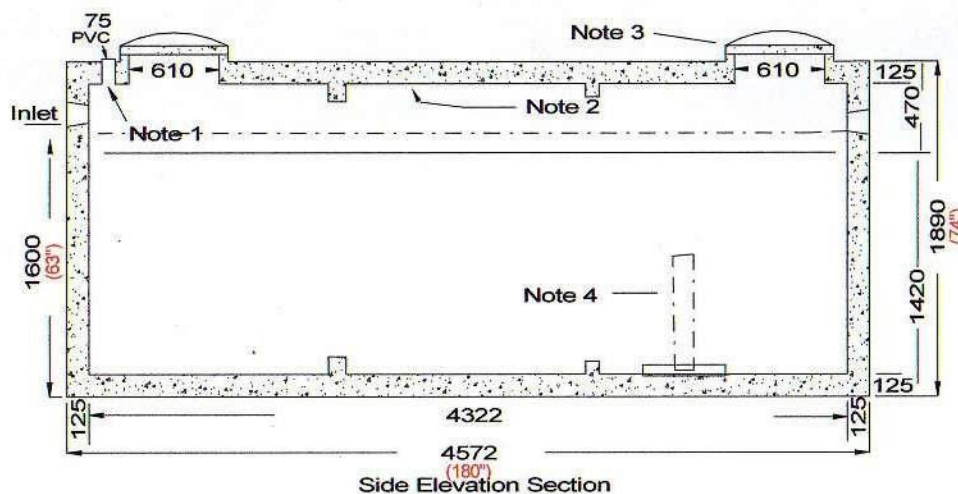

Tank markings observed:  
 Inlet & outlet  
 Marked on tank top - inlet end

NPCP 2009  
 13500  
 HOLDING  
 BD 1M  
 WC 13534  
 NON-SUL  
 AGINP  
 PML



Mastic Sealant

Tongue and Groove Joint